


Underblanket for Offset Coating Plates

Compressible Construction | Improves the Coating Transfer

PRODUCT FEATURES

- High Tech Carrier - providing greater stability
- Compressible construction
- Providing greater smash resistance
- Can reduce anilox bounce issues
- Consistent gauge
- No sinking or gauge loss
- Durable, long life
- Easy removal after long use
- Available as non adhesive version (rolls)
- Adhesive version available on request (cut pieces)

PRODUCT PROFILE

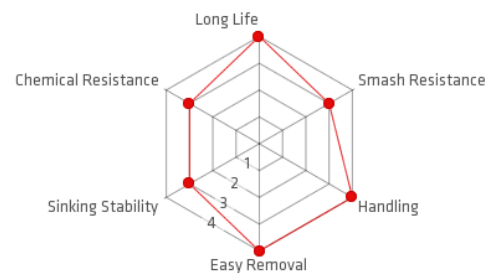

1 = not suggested
 2 = suitable
 3 = excellent
 4 = optimum

TECHNICAL SPECIFICATION

Thickness (Tolerance +/- 0.03mm)	From 1.00mm (0.039") up to 2.20mm (0.087")
Roll width	1080 mm (42 1/2") 1320 mm (52") 1480 mm (58 1/4") 1580 mm (62 1/4") 1680 mm (66")
Roll length	30m / 50m
Application	Rubber side to be mounted onto cylinder

CROSS SECTION

