


# Coating BLANKET for Offset Coating

Rubber Surface | Fabric 3ply Low Stretch Carcass

## PRODUCT FEATURES

- Suitable for water based (aqueous) and UV coating applications
- No ink build up surface technology
- Stable 3ply low stretch carcass
- Smooth surface provides optimum coating transfer
- Easy cutting both manual and with CAD plotter
- Suitable for food packaging
- High delamination resistance
- High smash resistance

## PRODUCT PROFILE

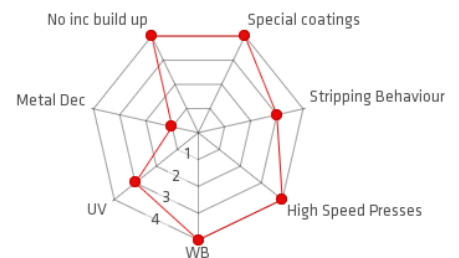

1 = not suggested  
2 = suitable  
3 = excellent  
4 = optimum

## TECHNICAL SPECIFICATION

Surface (Rubber / Polymer)	Rubber
Micro-Hardness	65° Shore A
Thickness (Tolerance +/- 0.03mm)	1.95mm (0.077")
Stripping Depth	0.90mm (0.035")
Roll width	1080mm (42 1/2") 1320mm (52") 1480mm (58 1/4") 1580mm (62 1/4") 1680mm (66")
Roll length	30m
Carrier (Polyester PET / Fabric)	Fabric 3 ply carcass
Compressible	intermediate

## CROSS SECTION

